

Job Name:

Schedule Reference:


Date:



**LONWORKS® INTERFACE
LMAP03U SPECIFICATIONS**


- Up to 50 units (CITY MULTI® and/or LOSSNAY®) can be connected with one LonWorks interface
- Power Source: 208/230V (60Hz)
- Operation/Setting
 - Request all Off (Emergency Stop); Request On/Off
 - Set Point
 - Request LOSSNAY Mode
 - Request Fan Speed
 - Request Local Prohibit On/Off and Set Point
 - Request Forced Thermostat Off
 - Filter Sign Reset
 - Time Stamp
 - Request Limit Temperature Setting Range
 - Request Simplified Locking
- Measuring/Monitoring
 - Emergency state
 - On/Off run state, Mode state, Set Point state
 - Lossnay mode state
 - Fan Speed state
 - Local Prohibit On/Off state, Mode state, Set Point state
 - Forced Thermostat Off state
 - Filter Run Time
 - Space Temperature
 - Alarm state
 - Collective Alarm for Indoor Unit and for LM Adapter
 - Error Code; Error Unit Address
 - Thermostat On/Off state_1; Thermostat On/Off state_2
 - Model Code
 - Defrost state
- Net Weight 7.5 lb. / 3.4 kg
- Dimensions: 13-7/16 H x 14-3/16 W x 2-3/8" D (340 x 360 x 59.6)

SYSTEM EXAMPLES

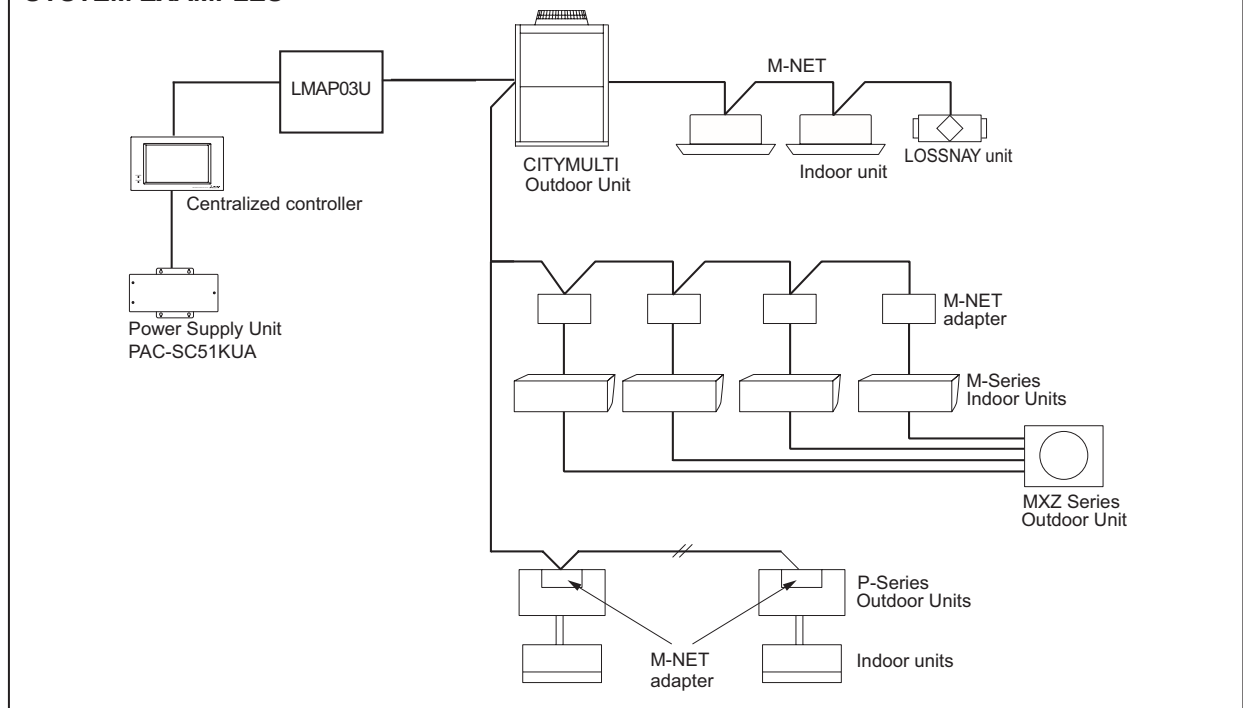

Model: LMAP03U - DIMENSIONS

Unit: mm [in.]

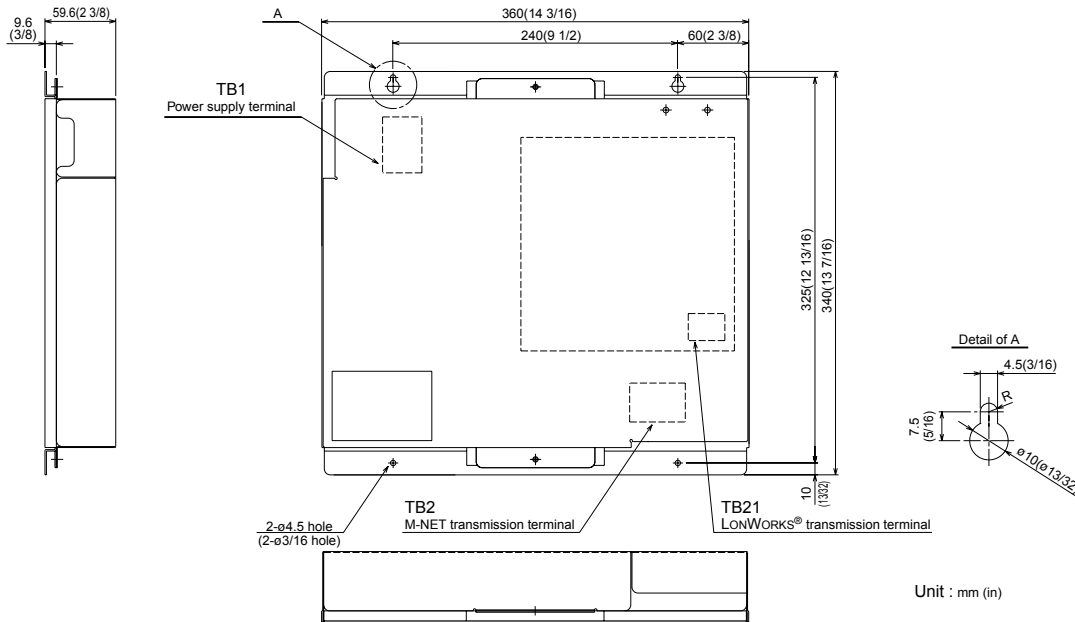

Unit : mm (in)

Specifications		Description
Dimensions		13-7/16 H x 14-3/16 W x 2-3/8" D (340 x 360 x 59.9 mm)
Net Weight		7-1/2 lb. (3.4 kg)
Power Source		208 /230V, 60Hz
Current Consumption		50mA (maximum)
Operation Environment	Temperature	Operating Range 5° to 109°F (-15° to +43°C)
		Storage Range -40° to +140°F (-20° to +60°C)
	Humidity	30 to 95 RH (no condensation)
Installation Environment		In the control box

Notes: